



L series FUEL DISPENSER

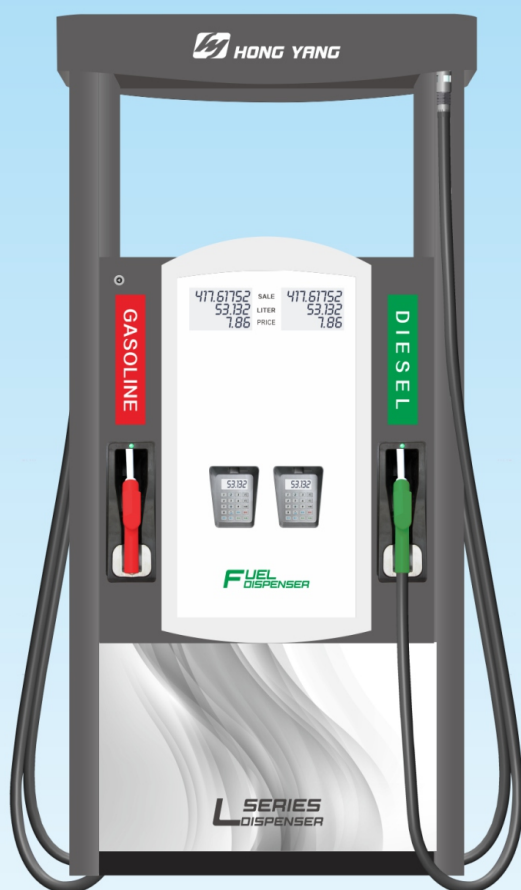

TECHNICAL PERFORMANCE

Flow rate	55±5 (L/min), or 85±5 (L/min)
Meter Accuracy	±0.3 %
Noise	≤72db
Horizontal suction Distance	50m
Vertical suction distance	6m
Single or three Phase Motor	AC220V/50Hz,0.75kw or AC380V/50Hz,0.75kw
Input Voltage	AC 220V /50 Hz or AC 380V /50 Hz
Electronic Counter	Liter range: 0.01 ~ 999999.99 Sale Range: 0.01 ~ 999999.99 Unit Price range: 0.01 ~ 9999.99 Totalizer range: 0 ~ 999999999
Environmental Condition	Temperature: -40℃ ~ +50℃ Humidity: 5% ~ 95%
Presetting function	Preset sale or volume
Data Storage	More than 10 years
Flexible Pipe	Included, 1.5" pipe
Hose	4.5m black, oil resistant



N=Nozzle
M=Meter
P=Pump

Model

★ L series CMD16875K-GA44

(Suction type, 2 Product, 4 Nozzles, 4 Flowmeters, 4 keypads, 4 displays)

Packing Size

★ 1160*660*2300 (Length*Thickness*Height)

★ 36 Sets in one 40 ft HQ container

Submersible type fuel dispenser is available

Printer, LED Rolling display, Multimedia TV (Optional)