


Yseries
FUEL DISPENSER

TECHNICAL PERFORMANCE

Flow rate	55±5 (L/min), or 85±5 (L/min)
Meter Accuracy	±0.3 %
Noise	≤72db
Horizontal suction Distance	50m
Vertical suction distance	6m
Single or three Phase Motor	AC220V/50Hz,0.75kw or AC380V/50Hz,0.75kw
Input Voltage	AC 220V /50 Hz or AC 380V /50 Hz
Electronic Counter	Liter range: 0.01~999999.99
	Sale Range:0.01~999999.99
	Unit Price range:0.01~9999.99
	Totalizer range:0~999999999
Environmental Condition	Temperature:-40℃ ~+50℃
	Humidity: 5% ~95%
Presetting function	Preset sale or volume
Data Storage	More than 10 years
Flexible Pipe	Included, 1.5" pipe
Hose	4.5m black,oil resistant

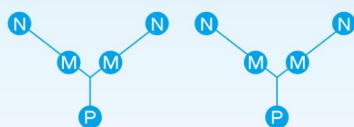

N=Nozzle
M=Meter
P=Pump

Model

★ Y series CMD I 687SK-GA44

(Suction type, 2 Product, 4 Nozzles, 4 Flowmeters, 4 keypads, 4 displays)

Packing Size

★ 1430*760*2350mm (Length*Thickness*Height)

★ 24 Sets in one 40 ft HQ container

Submersible type fuel dispenser is available

Printer,LED Rolling display,Multimedia TV (Optional)